


Kleen-Fit Guard DC003

Technical Datasheet



Product:	Kleen-Fit Guard DC003	Grid Material:	Aluminium – Minimum 95% recycled content in clo:
Category:	Fitted Entrance System	Grid Recycled Content:	95% recycled content
Sub-Category:	Grid System	Anodised Grid Lengths	
Typical Applications:	High traffic areas such as residential and care homes, medical practice, offices and administrative buildings, family homes, hotels, retail, sectors, shopping centres, schools, hospitals and airports	Black:	Max. 4000mm
Max Module Length:	4000mm Panels are manufactured specifically to customer requirements. Panel lengths available up to 4000mm left to right as required (Anodised panel lengths vary – see below)	Light Gold:	Max. 2600mm
Installation Method	Recessed in matwell or surface-laid with ramp frame	Medium Gold:	Max. 2600mm
Insert Material:	Heavy duty 85% polypropylene and 15% recycled	Dark Gold:	Max. 2600mm
Insert Depth:	12mm 17mm	Gun Metal Grey:	Max. 2500mm
Origin	Made In Europe	Light Bronze:	Max. 1600mm
		Medium Bronze:	Max. 4000mm
		Dark Bronze:	Max. 4000mm
		Fire Rating:	Hot Metal Nut BS4790:1987 (1996) - Low
		Light Fastness:	(BS EN ISO 105:B02) > 6
		Rubbing Fastness:	(BS EN ISO 105:X12) 5
		Water Fastness:	(BS EN ISO 105:B01) 5
		ISO9001:2018:	Yes
		BS8300 DDA Compliant:	Yes
		BS4790:1987:	Yes

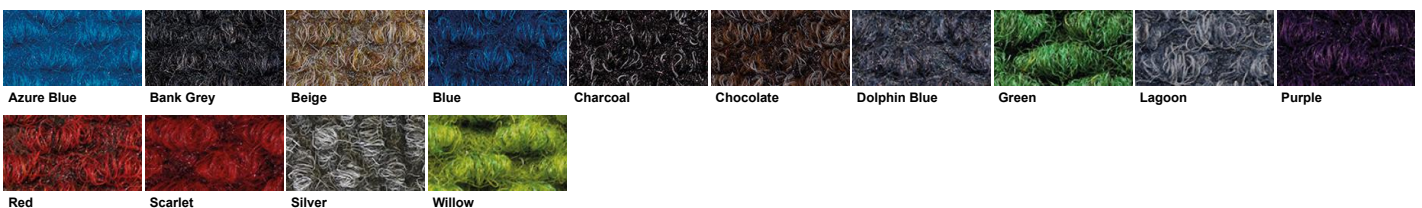

For all mats, we reserve the right of a production-related tolerance of +/- 3% in size. Colours are subject to commercial tolerance.

10/10/2023